
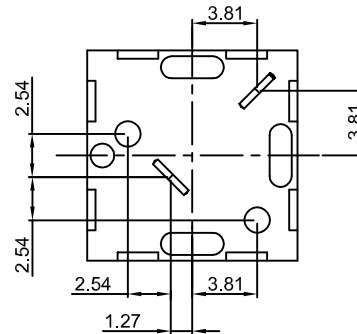




东莞市五盈电子有限公司

DONGGUAN FVWIN ELECTRONICS CO.,LTD

TS3

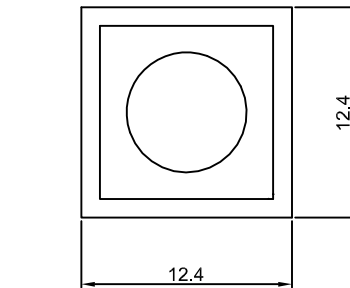

SPECIFICATIONS:

Circuit: SPST

Current:rating: 0.5A 30VDC ;
0.25A 50VDC ;

Contact resistance: 50m Max. (Initial) ;

Insulation resistance: 100MΩ Min. ;

Insulation strength: 1000VAC for 1 minute ;

Operating force: 400± 100gf ;
250± 100gf ;

Total travel: 1.0± 0.25mm ;

Operating Life: 10,000 cycles Min. ;

Machine Life: 100,000 cycles Min. ;

Operating temperature: -25° C~+65° C ;

Surroundings sumidity: 85%RH Max. ;

Function: :Momentary


MATERIAL:

Frame:PBT,UL rated:94V-2 Min. ;

Cap:ABS;

Terminal:Brass,Silver plated ;

Dome: SST, Gold plated with single side.

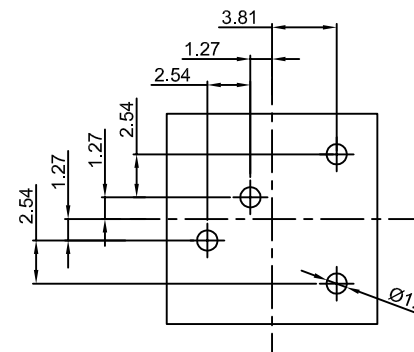

P.C.B.LAYOUT

W	White 白色
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
A	Gray 灰色
O	Orange 橘色
Cap Color X 上盖颜色 X	

				公差 TOLERANCES		.X±0.3	.XX±0.15	角度 ANGLE ±1°		单位 DIMENSION UNIT		mm.
A1	重新核对整理		N/A	版本	A1	比例尺	NONE	日期	2014.10.15	品名	TITLE	图号
A0	New Issue		N/A	核准	彭辉	核对		绘图	黄坚	TS3-AXN		DRAWING NO
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				